



Leadless Gold Chip

Introduction

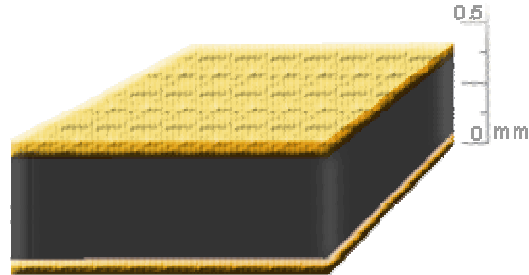

BetaTHERM Sensors offer high reliability Gold terminated leadless BetaCHIP thermistors that meet today's hybrid microelectronics needs. With metalization on top and bottom surfaces, attachment to hybrid, IC or PC circuits is accomplished using industry standard die attach and wire bonding techniques. Chips may be soldered or conductive epoxied to board termination points where space is at a premium. Typical chip sizes (1mm x 1mm x 0.25mm thick) allow for accurate robotic placement. Gold BetaCHIP thermistors are supplied in "gel" or "waffle" packs.

Shape and Dimensions

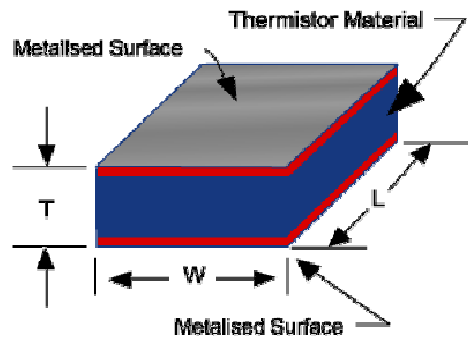

Features

- Rapid Time Response (<1 second typical in liquids).
- Standards supplied with $\pm 5\%$ and $\pm 10\%$ tolerance.
- $\pm 1\%$ and $\pm 2\%$ available upon request.
- Surface Mount Capability.
- 1 mW/°C Dissipation Constant in air at 25°C.
- Uniformly Sized for Pick & Place Assembly.
- Higher precision tolerance available.
- Square and Rectangular Configurations.
- RoHS Compliant

Applications

- WDM (Wavelength Division Multiplexing) for advanced frequency control in modern communications systems and wireless applications.
- Thermopile sensors for thermal radiation recognition and infrared sensing.
- Thermal protection of sensitive circuits.
- Hybrid circuit temperature compensation.
- Localized temperature sensing.




BetaTHERM Sensors
 BetaTHERM Sensors
 Design Centre North America
 HL Planar Technik GmbH

Ballybrit Business Park
 910 Tumpike Road
 2670 Indian Ripple Rd.
 Hauert 13, D-44227

Galway, Ireland
 Shrewsbury, MA 01545
 Dayton, OH 45440
 Dortmund, Germany

+353 91 753238
 +508 8420516
 +937 4271231
 +49 23197400

Part Numbering System

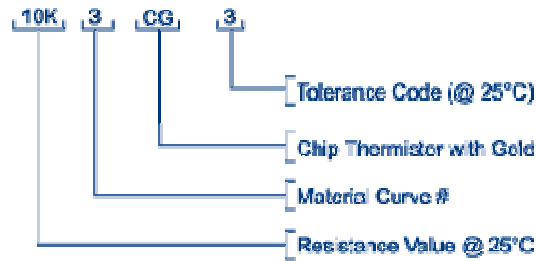

Electrical Specifications

Part Number ±5% @ 25°C	Part Number ±10% @ 25°C	Resistance @ 25°C (Ohms)	Alpha @25 °C	0/50°C Beta Value	Curve #	Nominal Chip Dimensions (mm)			Nominal Chip Dimensions (inches)		
						L	W	T	L	W	T
0.1K1CG3	0.1K1CG2	100	-3.50%	3108	1	1.397	1.397	0.305	0.055	0.055	0.012
0.3K1CG3	0.3K1CG2	300	-3.50%	3108	1	0.914	0.914	0.381	0.036	0.036	0.015
1K2CG3	1K2CG2	1000	-3.68%	3263	2	0.762	0.762	0.381	0.030	0.030	0.015
1K7CG3	1K7CG2	1000	-3.87%	3422	7	1.067	1.067	0.381	0.042	0.042	0.015
2.2K3CG3	2.2K3CG2	2252	-4.39%	3892	3	1.905	1.905	0.254	0.075	0.075	0.010
3K3CG3	3K3CG2	3000	-4.39%	3892	3	1.651	1.651	0.254	0.065	0.065	0.010
5K3CG3	5K3CG2	5000	-4.39%	3892	3	1.397	1.397	0.305	0.055	0.055	0.012
10K3CG3	10K3CG2	10000	-4.39%	3892	3	1.016	1.016	0.305	0.040	0.040	0.012
10K4CG3	10K4CG2	10000	-4.04%	3575	4	1.143	1.143	0.254	0.045	0.045	0.010
30K5CG3	30K5CG2	30000	-4.30%	3811	5	0.889	0.889	0.381	0.035	0.035	0.015
30K6CG3	30K6CG2	30000	-4.68%	4143	6	1.397	1.397	0.305	0.055	0.055	0.012
50K6CG3	50K6CG2	50000	-4.68%	4143	6	1.143	1.143	0.381	0.045	0.045	0.015
100K6CG3	100K6CG2	100000	-4.68%	4143	6	0.889	0.889	0.381	0.035	0.035	0.015
1M9CG3	1M9CG2	1000000	-5.20%	4582	9	0.889	0.889	0.254	0.035	0.035	0.010

For details on the minimum order quantity (MOQ) of this product, please contact BetaTHERM Sensors or your local BetaTHERM Sensors representative



北京赛斯维测控技术有限公司

北京市朝阳区望京西路48号

金隅国际C座1002

电话：+86 010 8477 5646

传真：+86 010 5894 9029

邮箱：sales@sensorway.cn

<http://www.sensorway.cn>



BetaTHERM Sensors
BetaTHERM Sensors
Design Centre North America
HL Planar Technik GmbH

Ballybrit Business Park
910 Tumpike Road
2670 Indian Ripple Rd.
Hautert 13, D-44227

Galway, Ireland
Shrewsbury, MA 01545
Dayton, OH 45440
Dortmund, Germany

+353 91 753238
+508 8420516
+937 4271231
+49 23197400