

# SR1E

## Industrial • Incremental Encoder Output

Linear Position up to 175 inches (3 meters)


0-125, 0-175 inch Full Stroke Range Options

Designed for Outdoor & IP67 environments

**In Stock for Quick Delivery!**



175-inch model shown

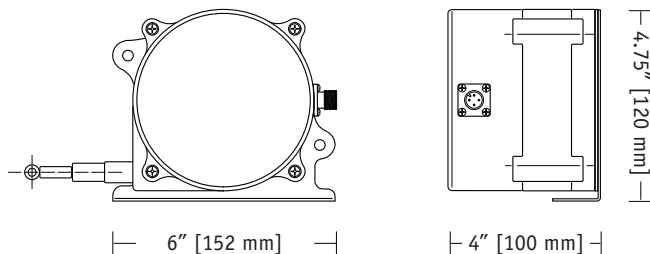


### SPECIFICATIONS

|                                    |                                       |
|------------------------------------|---------------------------------------|
| Full Stroke Range, <b>SR1E-125</b> | 125 inches (3175 mm)                  |
| Full Stroke Range, <b>SR1E-175</b> | 175 inches (4445 mm)                  |
| Output Signal                      | incremental encoder                   |
| Resolution                         | 101 ±2 pulses per inch                |
| Accuracy                           | ± .1% FS.                             |
| Repeatability                      | ± .05% FS.                            |
| Input Voltage                      | 5-30 VDC                              |
| Input Current                      | 100 mA max., no load                  |
| Sensor                             | incremental encoder                   |
| Output Driver Type                 | push-pull (note: $V_{in} = V_{out}$ ) |
| Output Driver Current              | 20 mA max., source/sink               |
| Maximum Velocity                   | 80 inches (2 meters) per second       |
| Maximum Acceleration               | 10 g (retraction)                     |
| Measuring Cable Tension            | 23 oz. (6.4 N) ±30%                   |
| Enclosure                          | polycarbonate                         |
| Measuring Cable                    | .034-inch dia. nylon-coated stainless |
| Electrical Connection              | M12 Connector (mating plug included)  |
| Environmental Suitability          | NEMA 6, IP67                          |
| Operating Temperature              | -4° to 185° F (-20° to 85° C)         |
| Weight                             | 2.5 lbs. (1.3 Kg)                     |

The SR1E is rugged, low-cost, high performance string pot built to withstand wet environments and outdoor applications. Designed for construction equipment and factory use, the SR1E is the perfect low-cost solution for OEM and stocking distributors.

At the heart of this sensor is a robust incremental encoder that delivers a linear resolution of 101 pulses per inch. The SR1E ships with an industry standard push-pull encoder driver that can be powered by 5-30 VDC. (Other resolutions and complimentary channels are available, please consult factory). Each sensor ships with a 4-pin, field installable, M12 connector and an additional 13 ft. (4 m) cordset is also available. Just like the rest of our SR1 series, the SR1E is in stock for quick delivery.


### ORDERING INFORMATION



Order No.

#### SR1E-125


125-inch stroke range, incremental encoder output, 4-pin M12 mating plug & mounting bracket included.



Order No.

#### SR1E-175

175-inch stroke range, incremental encoder output, 4-pin M12 mating plug & mounting bracket included.




Order No.

#### 9036810-0040

for short-run connections, optional 13-ft cordset with 4-pin M12 mating plug.

### Output Signal:

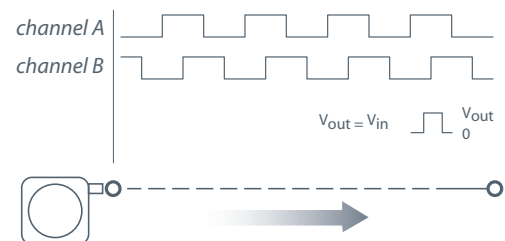

Consult factory for alternate resolution and differential output signals.


20630 Plummer Street • Chatsworth, CA 91311  
tel: 800.423.5483 • +1.818.701.2750 • fax: +1.818.701.2799



**celesco**  
www.sensorway.cn • sales@sensorway.cn


## Electrical Connection

### Field Installable Connector

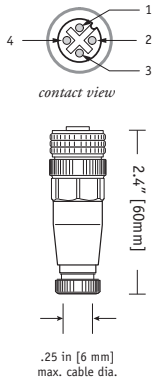

| pin | signal     |
|-----|------------|
| 1   | 5...30 VDC |
| 2   | common     |
| 3   | channel A  |
| 4   | channel B  |

### Cord Set Connections

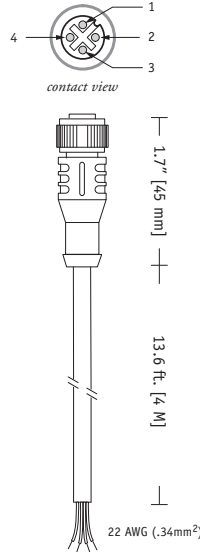

| pin | conductor | signal     |
|-----|-----------|------------|
| 1   | brown     | 5...30 VDC |
| 2   | white     | common     |
| 3   | blue      | channel A  |
| 4   | black     | channel B  |

#### cable specifications

|                 |                              |
|-----------------|------------------------------|
| length:         | 13 ft. (4m)                  |
| wire size:      | 22 AWG (.34mm <sup>2</sup> ) |
| cable material: | PVC                          |
| cable color:    | gray                         |

## Changing the Cable Exit


### Changing Measuring Cable Exit

To change the direction of the measuring cable, remove the 4 mounting bracket screws and rotate bracket to one of four available positions. See figures 1 - 4 on the following pages for mounting dimensions.

### Changing Electrical Connector Direction

To change the position of the electrical connector, remove the 4 rear cover screws and carefully separate rear cover from the sensor body.

Rotate the rear cover to desired position being careful to not tangle the wiring harness that runs to the connector.

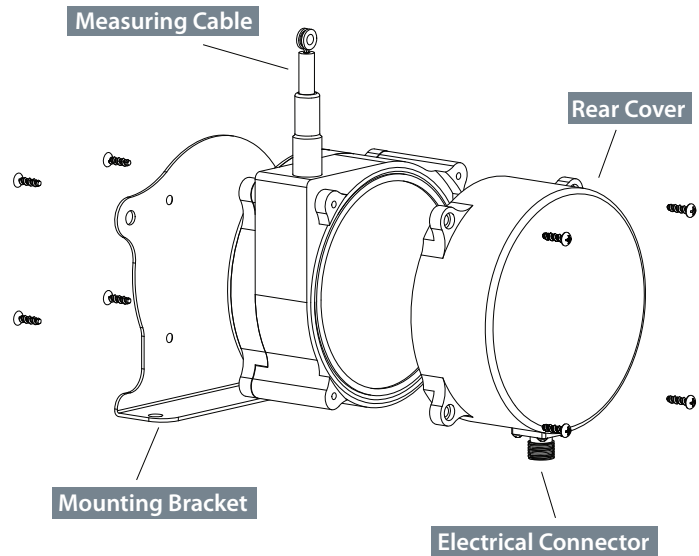

## Cable Exit Direction Options





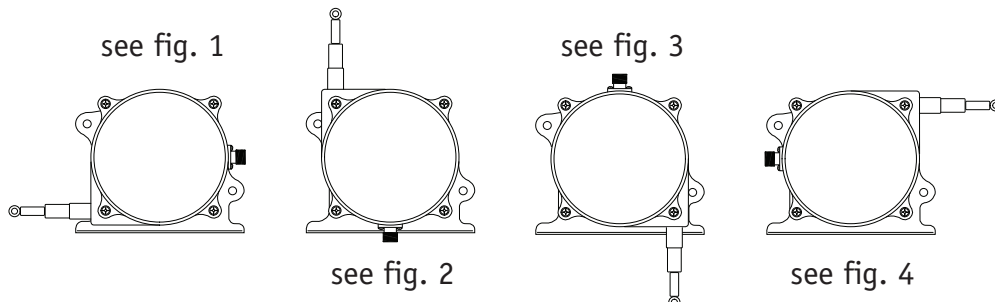


Fig. 1 - Outline Drawing (as shipped)

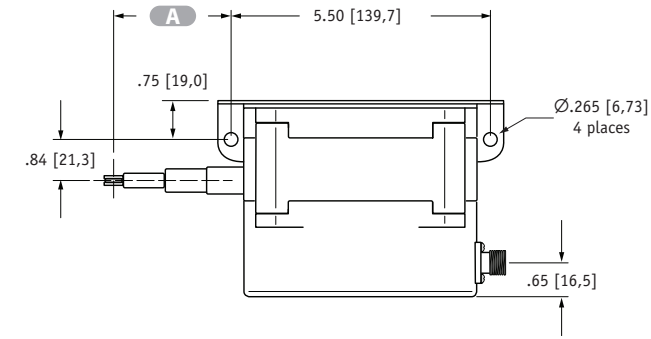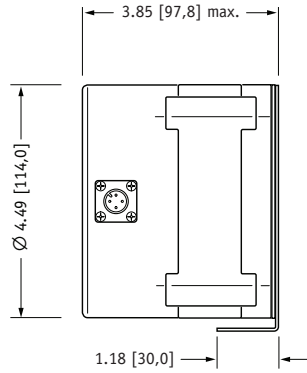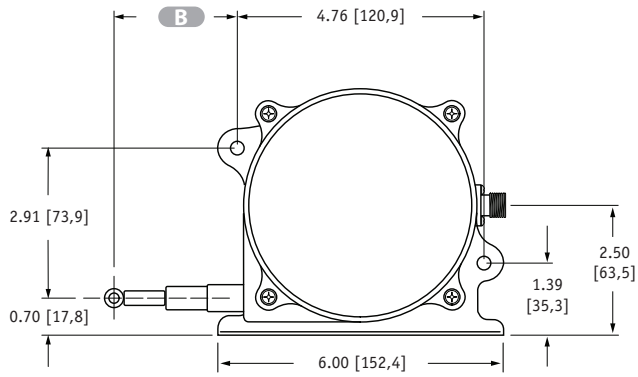


| Model           | A                        | B                         |
|-----------------|--------------------------|---------------------------|
| <b>125-inch</b> | 2.00 ±.13<br>[50,8 ±3,3] | 2.37 ±.13<br>[60,22 ±3,3] |
| <b>175-inch</b> | 2.87 ±.13<br>[72,8 ±3,2] | 3.24 ±.13<br>[82,2 ±3,2]  |

Cable Guide Detail

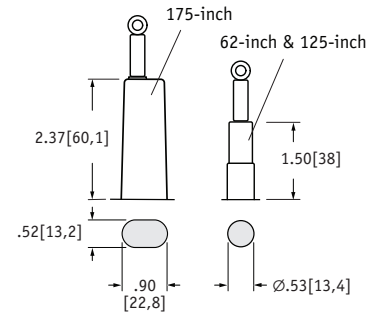


Eyelet Detail

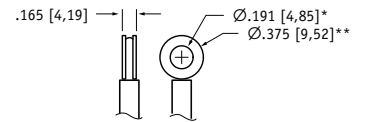

units are in inches [mm] tolerances are ± .04 [1,0] unless otherwise noted

\* tolerance = +.005 - .001 [+13 - .03]  
\*\* tolerance = +.005 - .005 [+13 - .13]

Fig. 2 - "Up" Cable Exit Direction

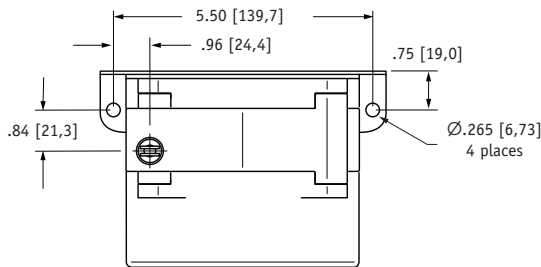

| Model           | A                         |
|-----------------|---------------------------|
| <b>125-inch</b> | 3.64 ±.13<br>[92,5 ±3,3]  |
| <b>175-inch</b> | 4.54 ±.13<br>[115,3 ±3,3] |

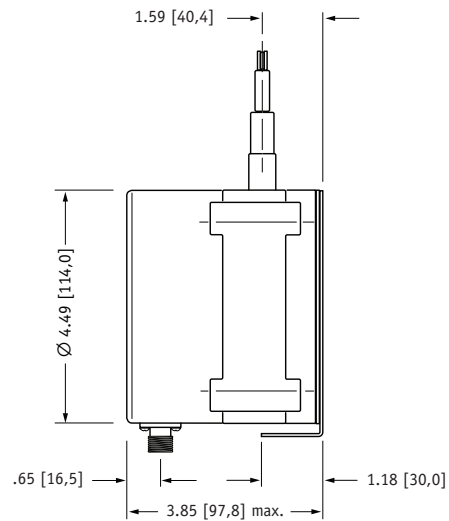
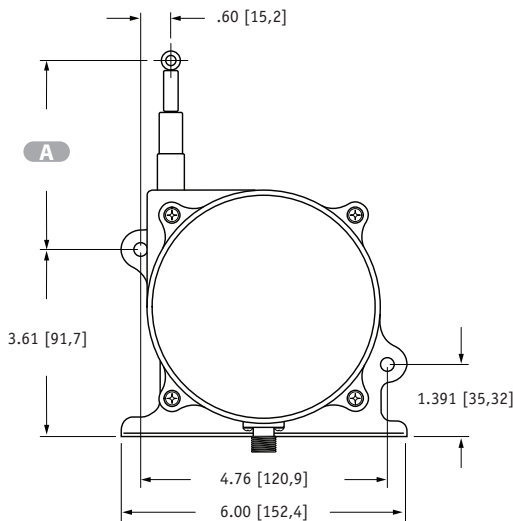


Fig. 3 - "Down" Cable Exit Direction


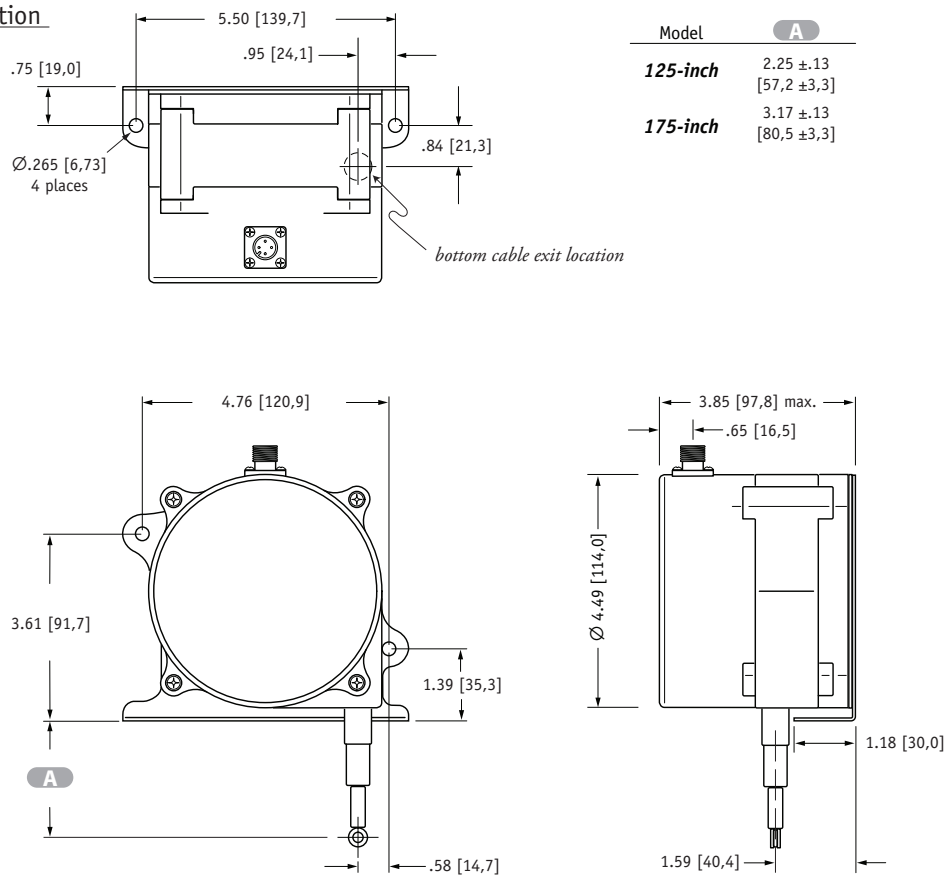


Fig. 4 - "Rear" Cable Exit Direction

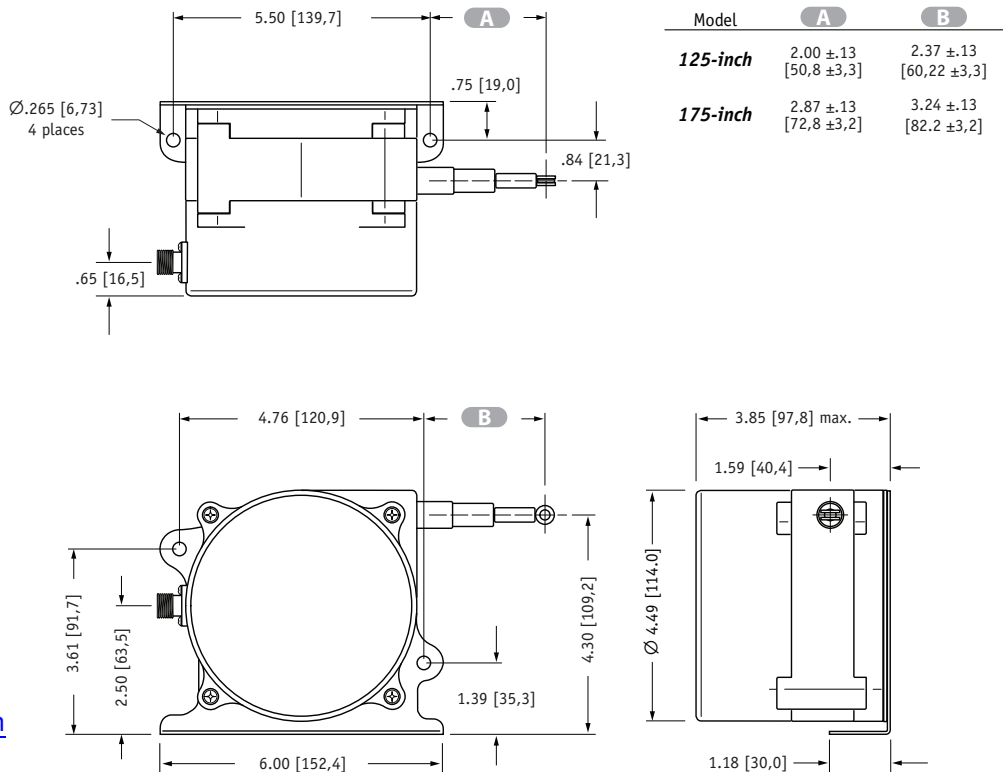

北京赛斯维测控技术有限公司  
 北京市朝阳区望京西路48号  
 金隅国际C座1002  
 电话：+86 010 8477 5646  
 传真：+86 010 5894 9029  
 邮箱：[sales@sensorway.cn](mailto:sales@sensorway.cn)  
<http://www.sensorway.cn>

version: 3.0 last updated: March 5, 2013

units are in inches [mm] tolerances are ± .04 [1,0] unless otherwise noted